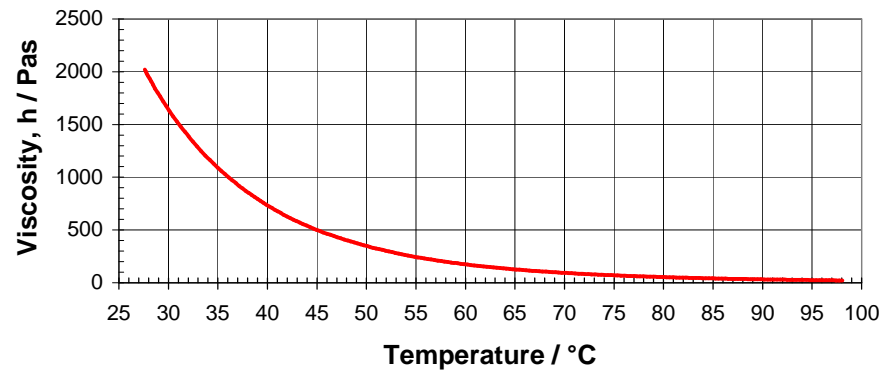
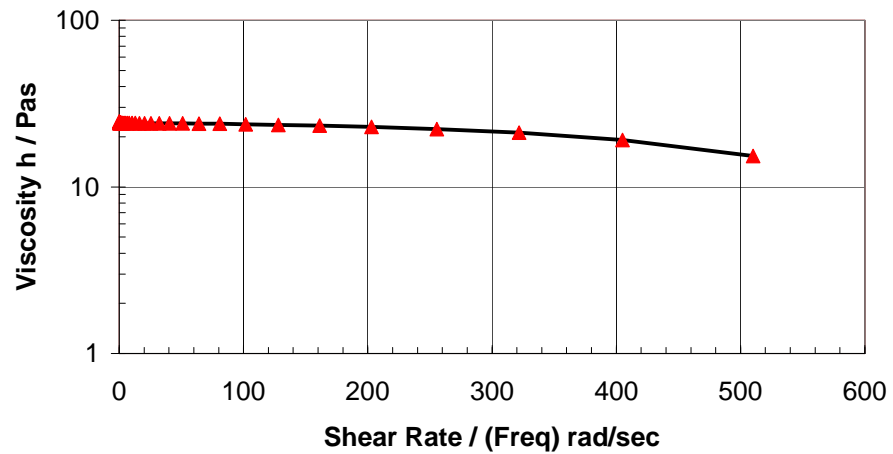


Advanced Materials**Flexibilizer DY 965**

REACTIVE TOUGHENER FOR EPOXY RESIN COMPOSITIONS
ADHESION PROMOTER

GENERAL	Recommended for the preparation of high impact resistant epoxy resin compositions. Useful to make adhesives and binders for cataphoretic electrodeposition primers. Suitable for the preparation of dust-free electronic preregs. For special binder systems made by the advancement process.	
CHEMICAL DESCRIPTION	Polyol	
APPLICATIONS	Prepreg Adhesive Resin Transfer Molding	
PROPERTIES	Good solubility in epoxy resins and in solvents Extremely good impact resistance and adhesion to steel between -40°C and +80°C in one component epoxy adhesives Toughness improvement of epoxy resin systems Improved adhesion to treated and non-treated aluminum	
TYPICAL PROPERTIES*	Visual Appearance	clear yellow to brownish viscous liquid
	Hydroxyl Value, eq./kg	1.00 - 1.15
	Viscosity @ 40°C (104°F), Pa s (Ps)	440 – 1280 (4400 - 12800)
	Density @ 25°C (77°F), g/cm ³ (lb/gal.)	1.04 (8.7)
	Flash Point, Closed Cup, °C (°F)	>200 (>392)

* Typical properties are based on Huntsman's test methods. Copies are available upon request.

Viscosity of Flexibilizer DY 965 by RDA**Viscosity of Flexibilizer DY 965
versus Temperature****Viscosity of Flexibilizer DY 965 Versus Shear Rate**

FORMULATIONS**Toughening of multifunctional epoxy with DDS cure**(Tactix[®] 556 / Aradur[®] 9664-1)

The mixing is done at 90°C to 95°C until an homogeneous system is obtained. It can then be applied on preregs via hot melt process at 120°C or 140°C.

- Increase of the fracture toughness properties
- Improvement of the impact resistance
- Constant Tg-level

	Unit	1	2	3
Tactix[®] 556	pbw	100	100	100
Flexibilizer DY 965	pbw	0	6.6	13.6
Aradur[®] 9664-1	pbw	24	25,2	22.6
Viscosity at 150°C	cPs	100	100	100
Curing cycle		3h 150°C + 3h 170°C + 2h 220°C		
Tg by DMA	°C	194	199	184
Flexural modulus	ksi	457	408	391
Flexural strength at 3.5%	ksi	15.8	14.0	13.6
Flexural strength at break	ksi	17.0	18.5	19.0
Elongation at break	%	3.87	5.60	7.29
Fracture Properties				
K _{1c}	in ^{1/2} •lb/in ²	540	990	1170
G _{1c}	in•lb/in ²	0.6	1.7	3.1
Coefficient of Linear Thermal Expansion				
α	ppm/°C	62.4	69.0	71.8

**FORMULATIONS
(CONTINUED)****Dust-free high Tg FR4 prepreg with DICY curing**

Blending of Flexibilizer DY 965 in the FR4 resin during the preparation of the varnish.

- Improvement of prepreg aspect (flexible, dust-free)
- Limited Tg drop

	Unit	1	2	3	4
LZ 8383 N80	pbw	100	97	94	90
	on solids				
Flexibilizer DY 965	pbw	0	3	6	10
DICY	pbw	3.5	3.5	3.5	3.5
2-Mi	pbw	0.03	0.03	0.03	0.03
Varnish gel time @ 171°C	s	180	175	175	180

Prepregging

Prepreg drying @ 170°C	s			135	
Prepreg flexibility	-	poor	medium	high	tacky
Prepreg dust	-	high	medium	low	none

Laminate performance Glass cloth 7628

Curing			1h/180°C		
Tg by DSC	(°C)	178	173	169	168
Solder test at 288°C					
Time to delamination	(min)	2	2	2	3
T 260	(min)	11	10.5	10.5	10.5
PCT 2h					
H2O Absorption	(%)	0.61	0.64	0.68	0.72
Solder 260°C / 25 s	-	pass	pass	pass	pass
Cu peeling	(lb/in)	9	9	9	7.3

**FORMULATIONS
(CONTINUED)****Adhesion properties of an epoxy/DICY system**

Blending the Flexibilizer DY 965 into Araldite® GY 6010 at 25°C

- It improves the adhesion for non-treated aluminum

	Unit	1	2	3	4	5
Araldite® GY 6010	pbw	100	100	100	100	100
Flexibilizer DY 965	pbw	---	---	10	20	20
DICY	pbw	14	14	14	14	14
Curing Cycle				1hr at 177°C		
Substrate				Al 2024T3 Bare		
Thickness	in			0.0025		
Pretreatment*		None	FPL	FPL	None	FPL
Tensile shear strength	psi	1,915	3,881	4,676	3,373	4,522
Type of Failure						
Adhesive	%	100	80	--	50	--
Cohesive	%	--	20	100	50	100

* FPL = Forest Products Laboratory Etching Procedure

PACKAGING & STORAGE

Flexibilizer DY 965 is available in 396 pound drums. It can be stored at room temperature with a shelf life of one year.

**HANDLING/SAFETY
PRECAUTIONS****Danger ! May cause dermal or respiratory sensitization.**

Do not get in eyes, on skin or clothing.
 Do not inhale mist or vapors.
 Keep container tightly closed when not in use and during transport.
 Wash after handling.
 Ensure adequate ventilation.

**Read Material Safety Data Sheet Before Using.
 For Industrial Use Only.**

FIRST AID**In case of contact :****Eyes :** Immediately flush with water for at least 15 minutes. Get immediate medical attention.**Skin :** Promptly wash thoroughly with mild soap and water.**Inhalation :** Remove to fresh air. Give oxygen if breathing is difficult.**Ingestion :** Do not induce vomiting. If conscious, give plenty of water. Get immediate medical attention.

IMPORTANT LEGAL NOTICE

Sales of the product described herein ("Product") are subject to the general terms and conditions of sale of either Huntsman Advanced Materials LLC, or its appropriate affiliate including without limitation Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., or Huntsman Advanced Materials (Hong Kong) Ltd. ("Huntsman"). The following supercedes Buyer's documents.

Huntsman warrants that at the time and place of delivery all Products sold to Buyer shall conform to the specifications provided to Buyer by Huntsman.

While the information and recommendations included in this publication are, to the best of Huntsman's knowledge, accurate as of the date of publication, NOTHING CONTAINED HEREIN (EXCEPT AS SET FORTH ABOVE REGARDING CONFORMANCE WITH SPECIFICATIONS PROVIDED TO BUYER BY HUNTSMAN) IS TO BE CONSTRUED AS A REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, NONINFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHTS, OR WARRANTIES AS TO QUALITY OR CORRESPONDENCE WITH PRIOR DESCRIPTION OR SAMPLE, AND THE BUYER ASSUMES ALL RISK AND LIABILITY WHATSOEVER RESULTING FROM THE USE OF SUCH PRODUCT, WHETHER USED SINGLY OR IN COMBINATION WITH OTHER SUBSTANCES.

No statements or recommendations made herein are to be construed as a representation about the suitability of any Product for the particular application of Buyer or user or as an inducement to infringe any patent or other intellectual property right. Buyer is responsible to determine the applicability of such information and recommendations and the suitability of any Product for its own particular purpose, and to ensure that its intended use of the Product does not infringe any intellectual property rights.

The Product may be or become hazardous. The Buyer should obtain Material Safety Data Sheets and Technical Data Sheets from Huntsman containing detailed information on Product hazards and toxicity, together with proper shipping, handling and storage procedures for the Product, and should comply with all applicable governmental laws, regulations and standards relating to the handling, use, storage, distribution and disposal of, and exposure to the Product. Buyer shall also take all steps necessary to adequately inform, warn and familiarize its employees, agents, direct and indirect customers and contractors who may handle or be exposed to the Product of all hazards pertaining to and proper procedures for safe handling, use, storage, transportation and disposal of and exposure to the Product, and the containers or equipment in which the Product may be handled, shipped or stored.

Araldite, Aradur and Tactix are registered trademarks of Huntsman LLC or an affiliate thereof in one or more countries, but not all countries.

© 2006 Huntsman Advanced Materials Americas Inc.

Main Offices :
Huntsman Corporation
10003 Woodloch Forest Dr.
The Woodlands
Texas 77380
(281) 719-6000

**Huntsman Advanced Technology
Center**
8600 Gosling Rd.
The Woodlands
Texas 77381
(281) 719-7400