



Scotchcast™ Electrical Resin 5

Two-Part, Room-Curing, Class B, Rigid, Unfilled Epoxy Liquid Resin

Data Sheet

Product Description

Electrical and electronic applications designed to operate @ 130°C (Class B) temperatures are the intended areas of use for 3M™ Scotchcast™ Electrical Resin 5. This transparent resin offers good physical and electrical properties plus low viscosity for maximum impregnating qualities.

- Good physical properties
- Reversion resistant
- Low viscosity

Handling Properties

Mix Ratio (A:B)	Wt 2 : 1
	Vol (%) 63.5 : 36.5
Viscosity	A = 12,500 cps
@ 23°C (73°F)	B = 100 cps
	Mixed = 3,000 cps
Density	A = 1.16 kg/l (9.71 lbs/gal)
	B = 0.995 kg/l (8.30 lbs/gal)
Flash Point	A = 232°C (450°F)
	B = 82°C (180°F)
Gel Time	18 min. @ 60°C (140°F)
Curing Guide	23°C (75°F) 24-48 hrs
	60°C (140°F) 1 hr
	95°C (203°F) 1/2 hr

Test Methods

¹ Fed. Std. No. 406, Method 1021	⁵ MIL-I-16923G
² Fed. Std. No. 406, Method 1011	⁶ Fed. Std. No. 406, Method 4031
³ Fed. Std. No. 406, Method 1031	⁷ Fed. Std. No. 406, Method 4021
⁴ MIL-I-16923E	⁸ Fed. Std. No. 406, Method 4041

Typical Data/Physical Properties

Property	Value
Color	Transparent Yellow
Hardness (BARCOL)	15
Specific Gravity	1.12
Compressive Strength¹	13,200 psi
10% Compression	(928 kg/cm ²)
Tensile Strength²	8000 psi
Ultimate	(562 kg/cm ²)
Elongation (% at break)²	7
Flexural Strength³	12,000 psi
	(844 kg/cm ²)
Thermal Conductivity⁴	4.4 x 10 ⁻⁴
(Cal/sec/cm ² /°C/cm)	
Linear Thermal Expansion⁴	17.7 x 10 ⁻⁵
(length/unit length/°C)	
Electric Strength⁶	325 volts/mil
(.125" [3 mm] Sample)	(13 kV/mm)
Mechanical Shock Resistance⁴	5
(Weight in lbs. of ball causing fracture)	(5.8 kg)
Moisture Absorption⁴	0.5
% weight increase, 240 hrs. @ 96% R.H.	
Thermal Aging	
% weight loss	
7 days @ 105°C	0.44
1000 hrs. @ 130°C	3.5
1000 hrs. @ 155°C	6.5
Boiling Water	
7 days % weight gain	1.8
Hydrolytic Stability⁵	
120 Days 71°C (160°F) 95% RH	
Hardness Loss % (Shore D)	1.2
Dielectric Constant⁷	
1000 Hz 23°C	3.6
Dissipation Factor⁷	
1000 Hz 23°C	0.06
Volume Resistivity⁸	10 ¹⁴ ohm-cm

Note: These are typical values and should not be used for specification purposes.

Usage Information

Mixing

Mix the separate parts before removing them from their containers. They may be warmed to 60°C (140°F) to aid mixing. (Gel time is approximately 20 minutes @ 60°C). Thoroughly mix parts A and B in the correct proportions. Mix until the color is absolutely uniform and a homogeneous mixture is obtained.

Deaerating

Air introduced during mixing can be removed by evacuating at 5 to 10 mm of mercury (Hg) absolute pressure. The resin can be warmed to aid air removal. The container side wall should be four times the height of liquid resin to contain the foaming that takes place under vacuum.

Casting and Impregnating


Heating the part, resin and mold aids impregnation. For maximum impregnation, evacuate at 5 mm of mercury (Hg) absolute pressure, or pour under vacuum and hold for several minutes before releasing. Castings, which require a large mass of resin, should be poured in several layers to minimize the temperature rise caused by exotherm. The heat produced by a large mass of this resin might otherwise cause the hardener to become volatile and leave bubbles in the casting.

Curing

Where minimum stress and maximum thermal shock resistance are required, the lower temperature cure cycle is recommended. (See "Curing Guide" of **Handling Properties** section). Time should be added to the cure cycle to allow the resin to reach the curing temperature.

Storage


Both parts of this resin system should be stored at temperatures between 20 to 30 degrees Celsius, and 30% to 60% relative humidity. When not in use, containers should be kept tightly closed. Storage at conditions outside those suggested may compromise the performance of the resin.

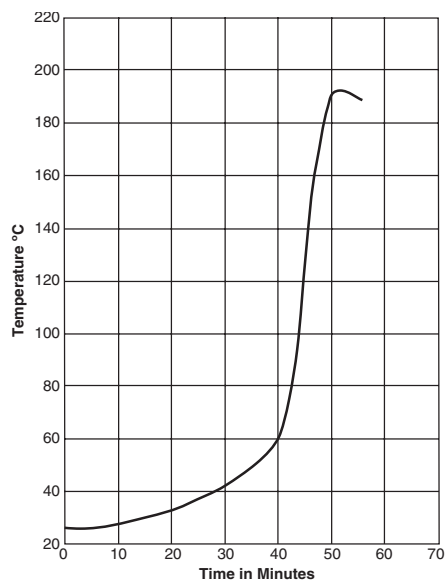

Exothermic Heat Rise for 1 lb. Sample


Handling and Safety Precautions

Read all Health Hazard, Precautionary and First Aid statements found in the Material Safety Data Sheet (MSDS) and/or product label of chemicals prior to handling or use.

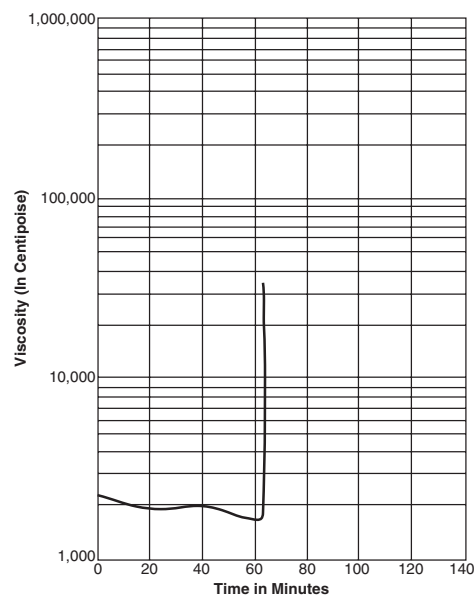


Brookfield Viscosity vs Time @ 73°F (23°C) 130 gram sample


Dissipation Factor %
 Fed. Std. No. 406, Method 4021
 (Test Frequencies in Hertz)

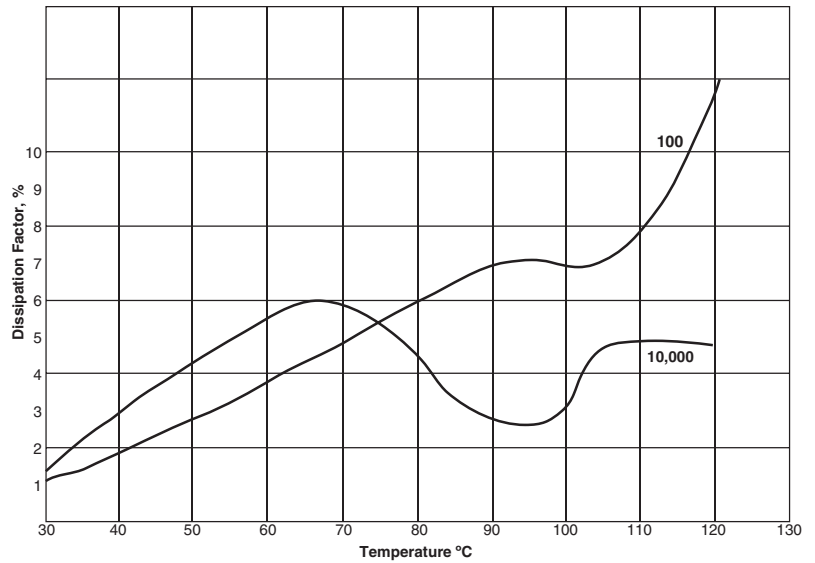

Dielectric Constant
 Fed. Std. No. 406, Method 4021
 (Test Frequencies in Hertz)

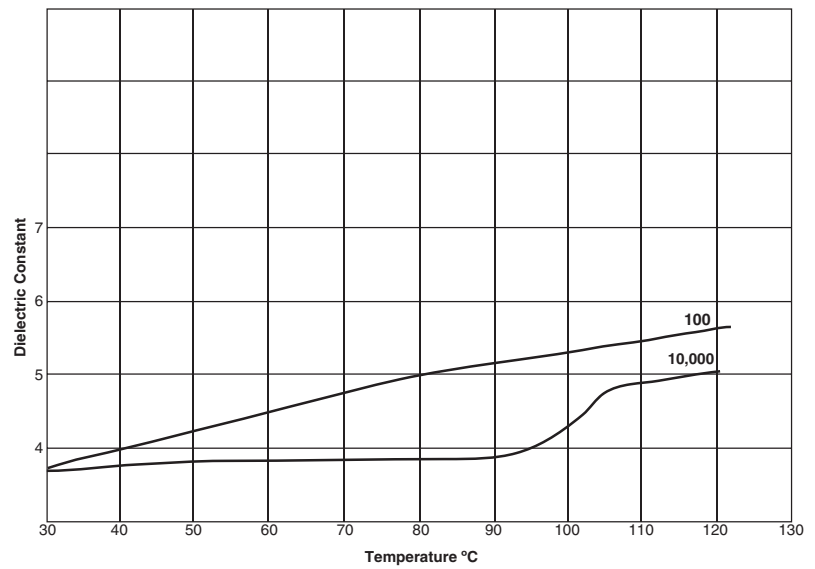

Volume Resistivity - ohm-cm
 Fed. Std. No. 406, Method 4041

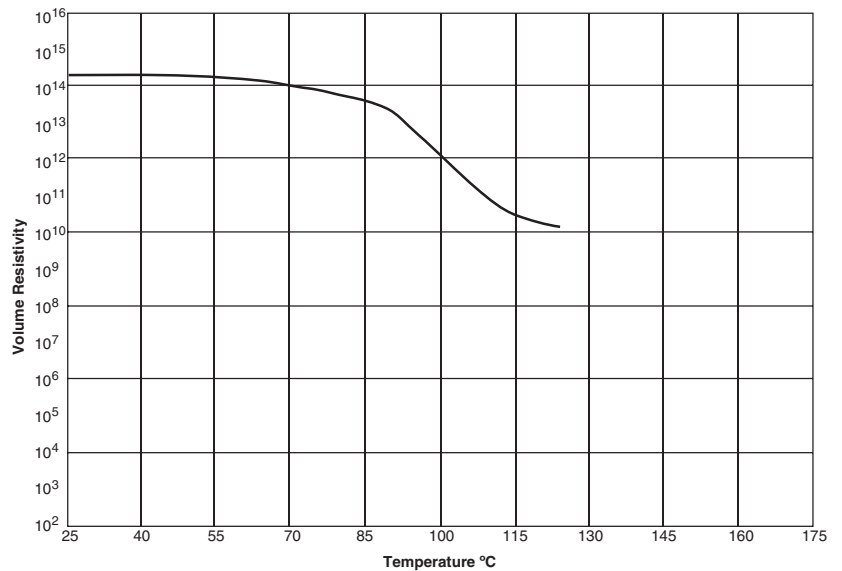

3M and Scotchcast are trademarks of 3M Company.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability. This product will be free from defects in material and manufacture for a period of one (1) year from the date of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, **3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.**

3M

Electrical Markets Division

6801 River Place Blvd.
Austin, TX 78726-9000
800/676-8381
Fax: 800/828-9329
www.3M.com/electrical/oem



*Printed on 50% recycled paper
with 10% post-consumer*

Litho in USA
© 3M 2004 78-8124-5902-8-B