

Advanced Materials


Tactix[®] 556* and Tactix[®] 756*

EPOXY RESIN

GENERAL

Tactix[®] 556 and Tactix[®] 756 are low moisture, hydrocarbon epoxy novolac resins.

CHEMICAL STRUCTURES

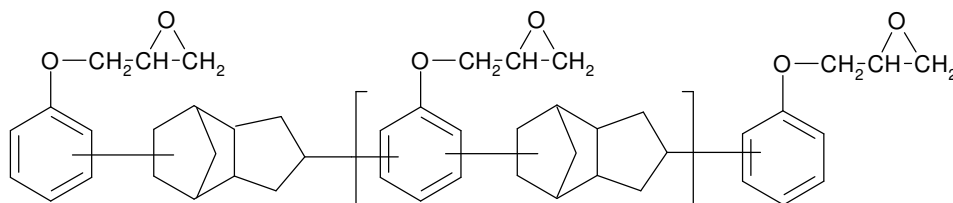

FEATURES AND BENEFITS

- Lower moisture absorption than many multifunctional epoxies commonly used in advanced composites
- Standard epoxy processing
- 300° F service temperature
- Suggested for adhesives and composites used at elevated temperatures in a moist environment

The dicyclopentadiene backbone low average molecular polarity – a feature critical to low moisture absorption. Its moisture absorption's considerably lower than that of typical phenolic novolacs such as Araldite[®] EPN 1139 and Araldite[®] EPN 1138 resins. Tactix[®] 556 resin shows an exceptional ability to retain properties under conditions of moisture and elevated temperature. Nevertheless, its outstanding properties come with no sacrifice to processability. Similar to bisphenol-A epoxy resin, Tactix[®] 556 resin can be used with a variety of conventional hardeners to optimize specific properties.

Tactix[®] 556 resin is ideal for new use where retention of properties under hot and wet conditions is critical. In some of the tables and figures below, the properties of Araldite[®] EPN 1139 and Araldite EPN 1138 resins have been included for comparison.

* In addition to the brand name product denomination may show different appendices, which allows us to differentiate between our production sites: e.g., BD = Germany, US = United States, IN = India, CI = China, etc.. These appendices are in use on packaging, transport and invoicing documents. Generally the same specifications apply for all versions. Please address any additional need for clarification to the appropriate Huntsman contact.

TYPICAL PROPERTIES* (ARE BASED ON HUNTSMAN'S TEST METHODS. COPIES ARE AVAILABLE UPON REQUEST)	Visual Appearance	Tactix® 556		Tactix® 756	
	Color, Gardner, max.	Amber to dark colored semi-solid		16	
	Viscosity @ 79 °C (174 °F), cPs	2.250		---	
	(mPa s)				
	Softening Point, °C (°F)	53 (127)		77-87 (170-188)	
	Epoxy Value, eq/kg	4.2-4.6		3.7-4.1	
	Epoxy Equivalent weight, g/eq	215-235		245-265	
	Hydrolyzable Chloride, ppm	<1000		<35	
	Density @ 25 °C (77 °F), g/cm ³ (lb/gal.)	1.21 (10.1)		1.22 (10.2)	
Flash Point, °C (°F)	>276 (>530)		>276 (>530)		
FORMULATIONS		1	2	3	
Tactix® 556		100	---	---	
Araldite® EPN 1139		---	100	---	
Araldite® EPN 1138		---	---	100	
Aradur® 976-1		27.6	35.5	34.9	
Cure Schedule		3 hrs @ 177 °C/ 2 hrs @ 232 °C	3 hrs @ 177 °C/ 2 hrs @ 250 °C	3 hrs @ 177 °C/ 2 hrs @ 250 °C	
Platen Gel Time @ 177 °C (350 °F)		73 min	20.5 min	16 min	
Flexural Strength (ksi)		18.5	19.5	19.0	
Flexural Modulus (ksi)		445	470	495	
Tensile Strength (ksi)		10.5	15.0	12.0	
Tensile Modulus (ksi)		380	455	465	
Tensile Elongation,%		3.7	7.0	4.4	
Moisture Absorption wt. % (14 Day Water Boil)		1.9	3.6	4.2	
Tg (TMA), °C		210	203	246	
Tg (DMA Tan δ), °C		234	218	276	
CTLE (below Tg, ppm/°C)		59	60	55	
Chemical Resistance		% weight change*			
Reagent		1	2	3	
JP4 Fuel		<0.5	<0.5	<0.5	
Hydraulic Fluid (Skydrol 500B-4, Monsanto)		<0.5	<0.5	<0.5	
De-icing Fluid (Propylene-Glycol mixture)		<0.5	<0.5	<0.5	

* Following a 28-day immersion

FORMULATIONS (CONTINUED)	Electrical Properties	Frequency	Dielectric	Dissipation
		Constant	Factor	
Tactix [®] 556		1 kHz	4.14	0.0116
		10 kHz	4.05	0.0208
		50 kHz	3.95	0.0263
		100 kHz	3.90	0.0269
Araldite [®] EPN 1139		1 kHz	4.50	0.0167
		10 kHz	4.36	0.0259
		50 kHz	4.23	0.0289
		100 kHz	4.18	0.0289
Araldite [®] EPN 1138		1 kHz	4.86	0.0207
		10 kHz	4.68	0.0310
		50 kHz	4.51	0.0365
		100 kHz	4.44	0.0370

**PACKAGING &
STORAGE**

Tactix 556 is packaged in 500 pounds drums. The shelf life is two years if stored at room temperature.

Tactix 756 is packaged in 150 pounds fiber drums. It has a shelf life of five years if the storage temperature is below 65°F.

**HANDLING
PRECAUTIONS****Personal hygiene***Safety precautions at workplace*

protective clothing	yes
gloves	essential
arm protectors	recommended when skin contact likely
goggles/safety glasses	yes

Skin protection

before starting work	Apply barrier cream to exposed skin
after washing	Apply barrier or nourishing cream

Cleansing of contaminated skin

Dab off with absorbent paper, wash with warm water and alkali-free soap, then dry with disposable towels. Do not use solvents

Disposal of spillage

Soak up with sawdust or cotton waste and deposit in plastic-lined bin

Ventilation

of workshop	Renew air 3 to 5 times an hour
of workplaces	Exhaust fans. Operatives should avoid inhaling vapours

FIRST AID

Contamination of the *eyes* by resin, hardener or mix should be treated immediately by flushing with clean, running water for 10 to 15 minutes. A doctor should then be consulted.

Material smeared or splashed on the *skin* should be dabbed off, and the contaminated area then washed and treated with a cleansing cream (see above). A doctor should be consulted in the event of severe irritation or burns. Contaminated clothing should be changed immediately.

Anyone taken ill after *inhaling* vapours should be moved out of doors immediately.

In all cases of doubt call for medical assistance.

IMPORTANT LEGAL NOTICE

Huntsman Advanced Materials warrants only that its products meet the specifications agreed with the user. Typical properties, where stated, are to be considered as representative of current production and should not be treated as specifications.

The manufacture of materials is the subject of granted patents and patent applications; freedom to operate patented processes is not implied by this publication.

While all the information and recommendations in this publication are, to the best of Huntsman Advanced Material's knowledge, information and belief, accurate at the date of publication, NOTHING HEREIN IS TO BE CONSTRUED AS A WARRANTY, WHETHER EXPRESS OR IMPLIED, INCLUDING BUT WITHOUT LIMITATION, AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN ALL CASES, IT IS THE RESPONSIBILITY OF THE USER TO DETERMINE THE APPLICABILITY OF SUCH INFORMATION AND RECOMMENDATIONS AND THE SUITABILITY OF ANY PRODUCT FOR ITS OWN PARTICULAR PURPOSE.

The behaviour of the products referred to in this publication in manufacturing processes and their suitability in any given end-use environment are dependent upon various conditions such as chemical compatibility, temperature, and other variables, which are not known to Huntsman Advanced Materials. It is the responsibility of the user to evaluate the manufacturing circumstances and the final product under actual end-use requirements and to adequately advise and warn purchasers and users thereof.

Products may be toxic and require special precautions in handling. The user should obtain Safety Data Sheets from Huntsman Advanced Materials containing detailed information on toxicity, together with proper shipping, handling and storage procedures, and should comply with all applicable safety and environmental standards.

Hazards, toxicity and behaviour of the products may differ when used with other materials and are dependent on manufacturing circumstances or other processes. Such hazards, toxicity and behaviour should be determined by the user and made known to handlers, processors and end users.

Except where explicitly agreed otherwise, the sale of products referred to in this publication is subject to the general terms and conditions of sale of Huntsman Advanced Materials LLC or of its affiliated companies including without limitation, Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., and Huntsman Advanced Materials (Hong Kong) Ltd.

Huntsman Advanced Materials is an international business unit of Huntsman Corporation. Huntsman Advanced Materials trades through Huntsman affiliated companies in different countries including but not limited to Huntsman Advanced Materials LLC in the USA and Huntsman Advanced Materials (Europe) BVBA in Europe.

Aradur, Araldite and Tactix are registered trademarks of Huntsman Corporation or an affiliate thereof.

Copyright © 2007 Huntsman Corporation or an affiliate thereof. All rights reserved.

A solid red vertical bar is positioned to the left of the contact information.

Main Office :
Huntsman Advanced Materials (Switzerland) GmbH
Klybeckstrasse 200
CH-4057 BASEL
Switzerland
+41 61 966 3333